



Oras

Installation and maintenance guide




4-15



16-24



25



26-33



34



Oras App



apps.oras.com

Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.

Google Play and the Google Play logo are trademarks of Google Inc.

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Oras Group is under license. Other trademarks and trade names are those of their respective owners.



Lithium 2CR5 6 V


I (ISO 3822)

EN 15091

100 - 1000 kPa

max. +70°C

IP 55



6150FZ *



6150F

6150FZ-080 * 0.07 l/s / max. 8 s

6150FZ-102 * 0.028 l/s

6150FZ-104 * 0.056 l/s

6150FZ-105 * 0.07 l/s





mpi.oras.com/6150FZ

6151FZ *

6151FZ-33 *




6151FZ-104 * 0.056 l/s

6151FZ-105 * 0.07 l/s



mpi.oras.com/6151FZ



6155FZ *



mpi.oras.com/6155FZ

6159FZ *

0.09 l/s



mpi.oras.com/6159FZ

Lithium 2CR5 6 V



I (ISO 3822)

EN 15091



100 - 1000 kPa

max. +70°C

IP 55



6250FZ





mpi.oras.com/6250FZ

1714FZ 0.08 l/s




1714F

1714FZ-102 0.028 l/s





mpi.oras.com/1714FZ

2814FZ



mpi.oras.com/2814FZ

6153FZ




mpi.oras.com/6153FZ





Lithium 2CR5 6 V
I (ISO 3822)
EN 15091
100 - 1000 kPa

max. +70°C
IP 55





4814FZ

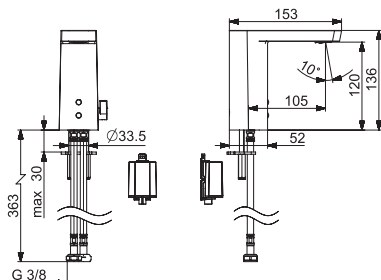


mpi.oras.com/4814FZ

6330FZ





mpi.oras.com/6330FZ

6331FZ



mpi.oras.com/6331FZ



2816FZ

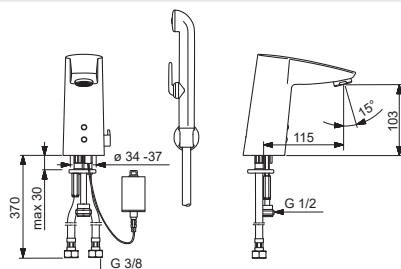


mpi.oras.com/2816FZ

Lithium 2CR5 6 V
I (ISO 3822)
EN 15091
100 - 1000 kPa

max. +70°C
IP 55




6332FZ




mpi.oras.com/6332FZ

6333FZ

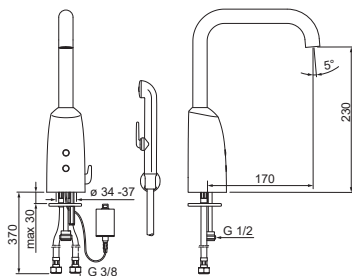

mpi.oras.com/6333FZ

6152FZ 100 - 500 kPa

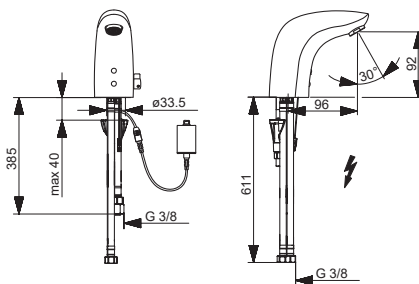


mpi.oras.com/6152FZ




Lithium 2CR5 6 V
I (ISO 3822)
EN 15091
100 - 1000 kPa

max. +70°C
IP 55





3014F

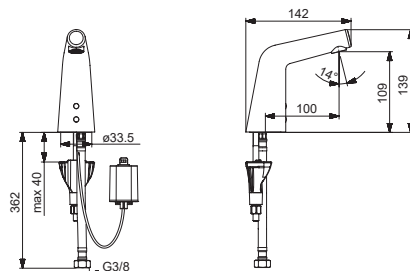



mpi.oras.com/3014F

3016F



mpi.oras.com/3016F


3017F





mpi.oras.com/3017F

9 / 12 V
I (ISO 3822)
EN 15091
100 - 1000 kPa

max. +70°C
IP 55




6125FZ

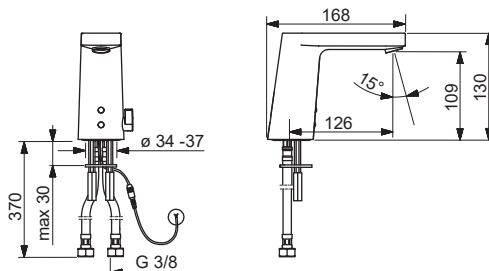


mpi.oras.com/6125FZ

6222FZ

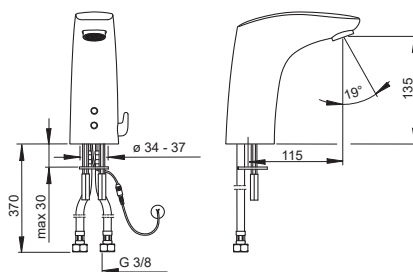


mpi.oras.com/6222FZ

6221FZ 100 - 500 kPa

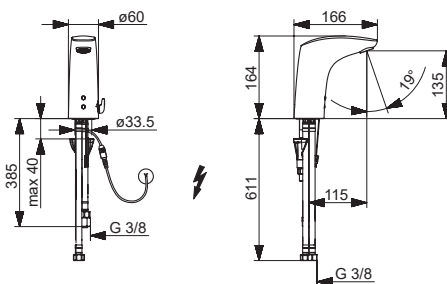

mpi.oras.com/6221FZ

1724FZ

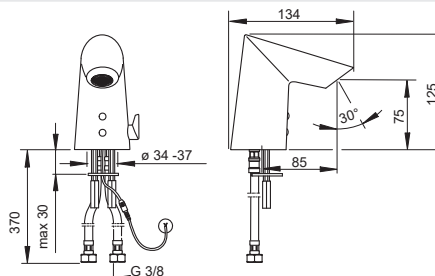


mpi.oras.com/1724FZ



9 / 12 V
I (ISO 3822)
EN 15091
100 - 1000 kPa

max. +70°C
IP 55





6120FZ

6120FZ-080 0.07 l/s max. 8 s



6120FZ-102 0.028 l/s

6120FZ-104 0.056 l/s



mpi.oras.com/6120FZ




6123FZ



mpi.oras.com/6123FZ



2826FZ

2816FZ



mpi.oras.com/2826FZ



6121FZ




mpi.oras.com/6121FZ

9 / 12 V
I (ISO 3822)
EN 15091
100 - 1000 kPa

max. +70°C
IP 55





3014FT

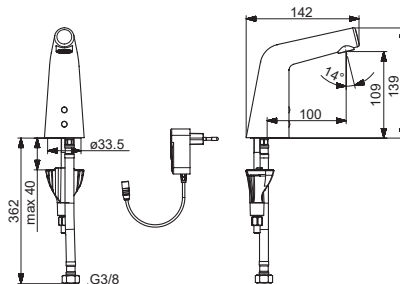


mpi.oras.com/3014FT

3016FT

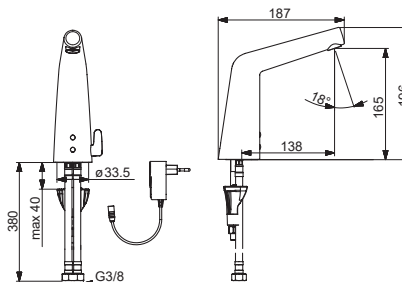

mpi.oras.com/3016FT

3017FT

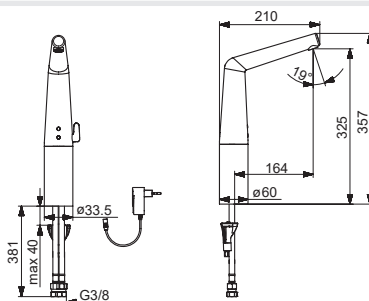


mpi.oras.com/3017FT




230 / 9 V
I (ISO 3822)
EN 15091
100 - 1000 kPa

max. +70°C
IP 55 / transformer IP 20





1724FTZ

0.08 l/s

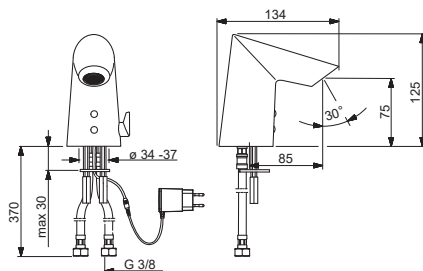


mpi.oras.com/1724FTZ

2824FTZ

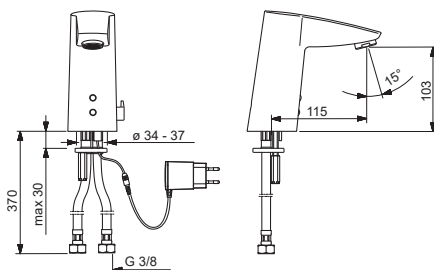



mpi.oras.com/2824FTZ

6120FTZ

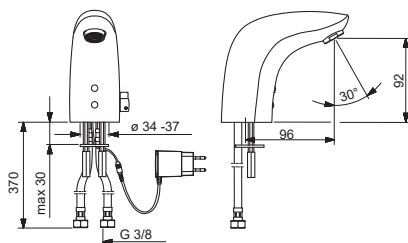

mpi.oras.com/6120FTZ

4824FTZ

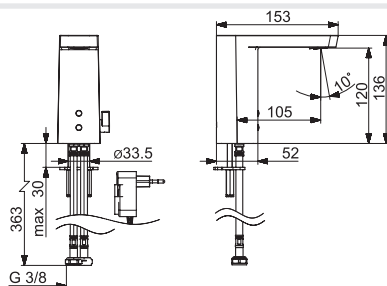

mpi.oras.com/4824FTZ

230 / 9 V



I (ISO 3822)

EN 15091



100 - 1000 kPa

max. +70°C

IP 55 / transformer IP 20





6123FTZ






mpi.oras.com/6123FTZ

6223FTZ






mpi.oras.com/6223FTZ

6334FTZ



mpi.oras.com/6334FTZ

6335FTZ




mpi.oras.com/6335FTZ





230 / 9 V
I (ISO 3822)
EN 15091
100 - 1000 kPa

max. +70°C
IP 55 / transformer IP 20






2826FTZ

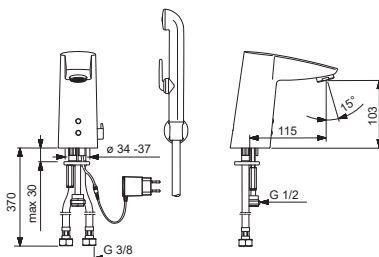


mpi.oras.com/2826FTZ






- | | |
|----|--|
| GB | Power supply requirement: Power supply output must be short circuit protected |
| CZ | Požadavky týkající se napájecího zdroje: Výstup napájecího zdroje musí být chráněn proti zkratu |
| DE | Stromversorgungsvoraussetzungen: Stromversorgungsspannung muss kurzschlussgeschützt sein. |
| DK | Krav til strømforsyning: Strømforsyningsudgang skal være kortslutningsbeskyttet |
| EE | Näüded vooluallikale: Vooluallika väljund peab olema kaitsitud lühise eest |
| ES | Requisitos del suministro eléctrico: el suministro eléctrico debe estar protegido contra cortocircuitos |
| FI | Vaattimukset virtälähteelle: Virtälähteen ulostulon tulee olla oikosulkusuojattu |
| FR | Unit d'alimentation électrique: La sortie de l'unité d'alimentation doit être protégée contre le court-circuit |
| IT | Requisiti dell'alimentazione: L'uscita deve essere protetta da cortocircuiti |
| LT | Reikalavimai maitinimo šaltiniui: turi būti apsauga nuo trumpo jungimo |
| LV | Prasības attiecībā uz barošanas ierīci: ierīces izvadam jābūt aizsargātam pret īsslēgumiem |
| NL | Veristen voor de voeding: De uitgang van de voeding moet beschermd zijn tegen kortsluitingen |
| NO | Krav til strømforsyning: Strømforsyningsspenning må være kortslutningssikret |
| PL | Wymagania w stosunku do zasilacza: Zasilacz musi być wyposażony w zabezpieczenie przeciwzwarciowe |
| RO | Pentru alimentarea cu putere: borna de putere trebuie să fie protejată la scurtcircuit |
| RU | Требования к источнику тока: Выход источника тока защищен от короткого замыкания |
| SE | Krav på matningsdon: Utspänningen skall vara kortslutningssäker |
| SK | Požiadavka na napájanie: Výstup napájania musí byť chránený voči skratu. |
| UA | Вимоги до джерела струму: Вихід джерела струму захищений від короткого замикання. |
| PT | Requisitos de alimentação eléctrica: a alimentação eléctrica deve estar protegida contra curto-circuito. |
| GR | Προϋποθέσεις για αδιάλειπτη παροχή ρεύματος: Τάση εξόδου ασφαλισμένη έναντι βραχυκυκλώματος |
| SJ | Zahteva za napajanje: Izhod za napajanje mora biti zaščiten s kratkim stikom |
| HU | Áramellátás: A tápegység kimeneténél fontos az érintésvédelem biztosítani. |




Oras 199275

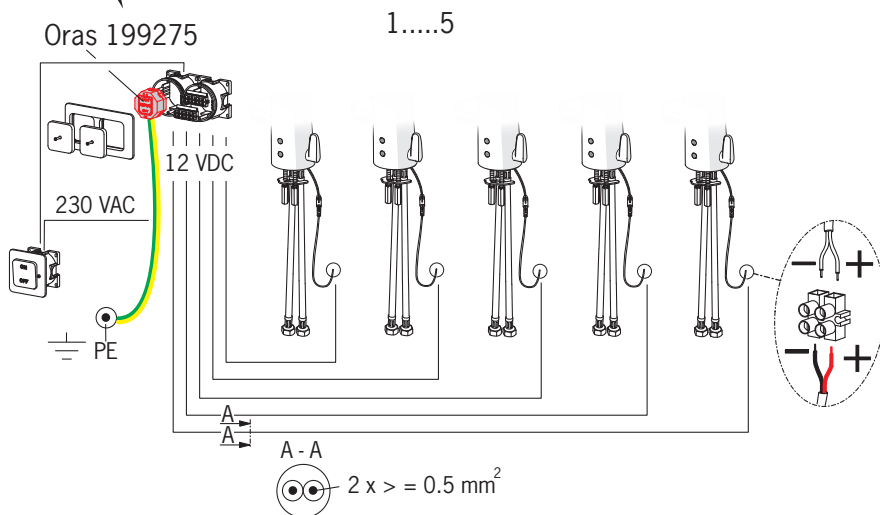




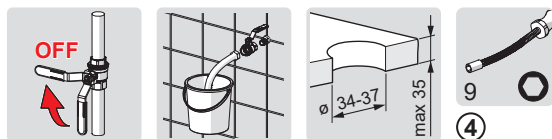



1 A

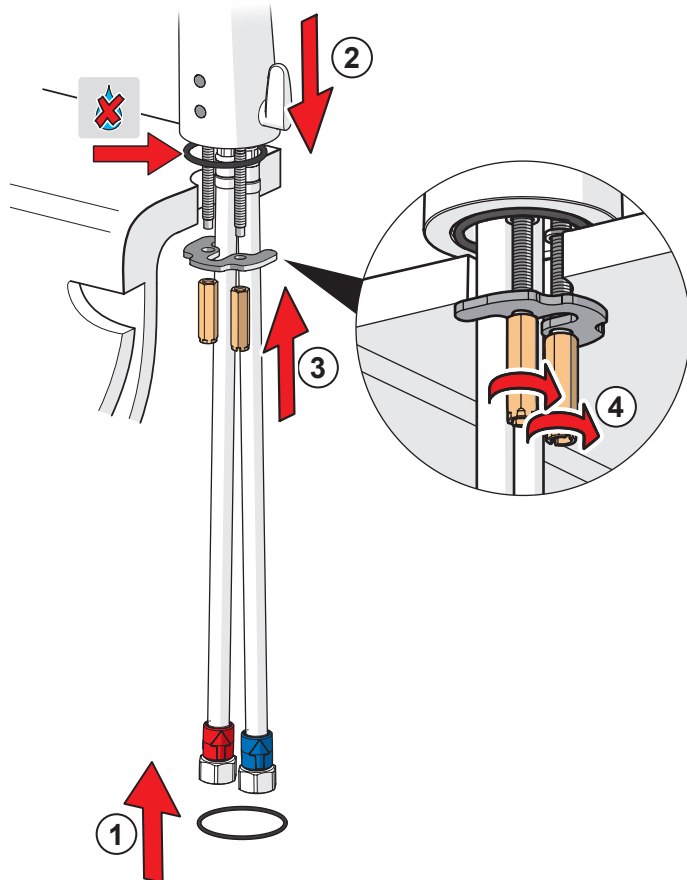














1 B

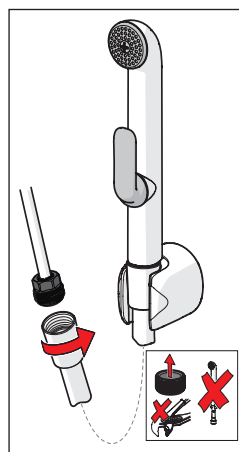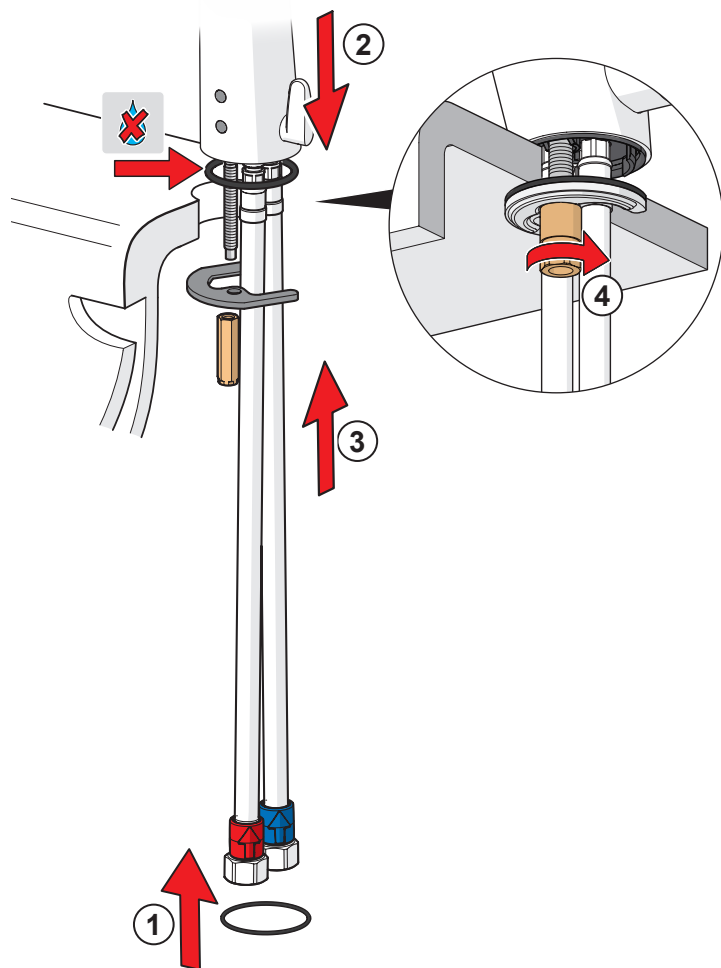


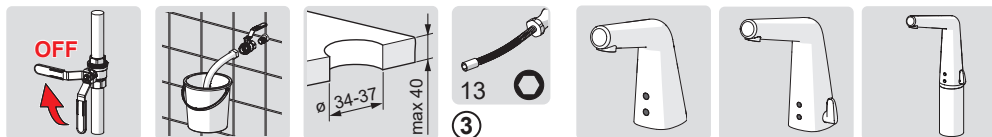

1C

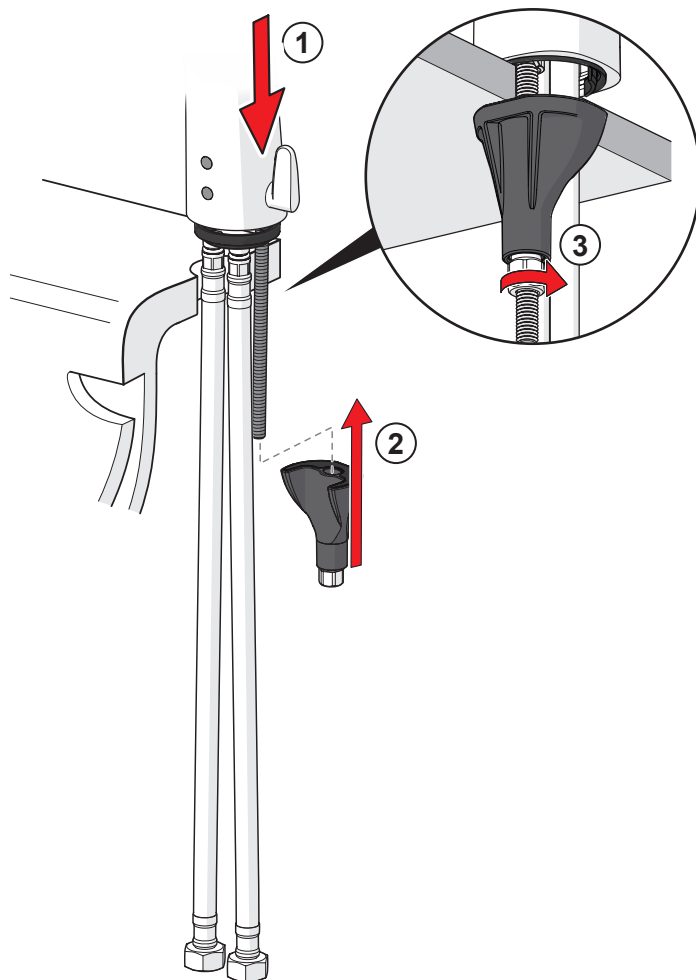

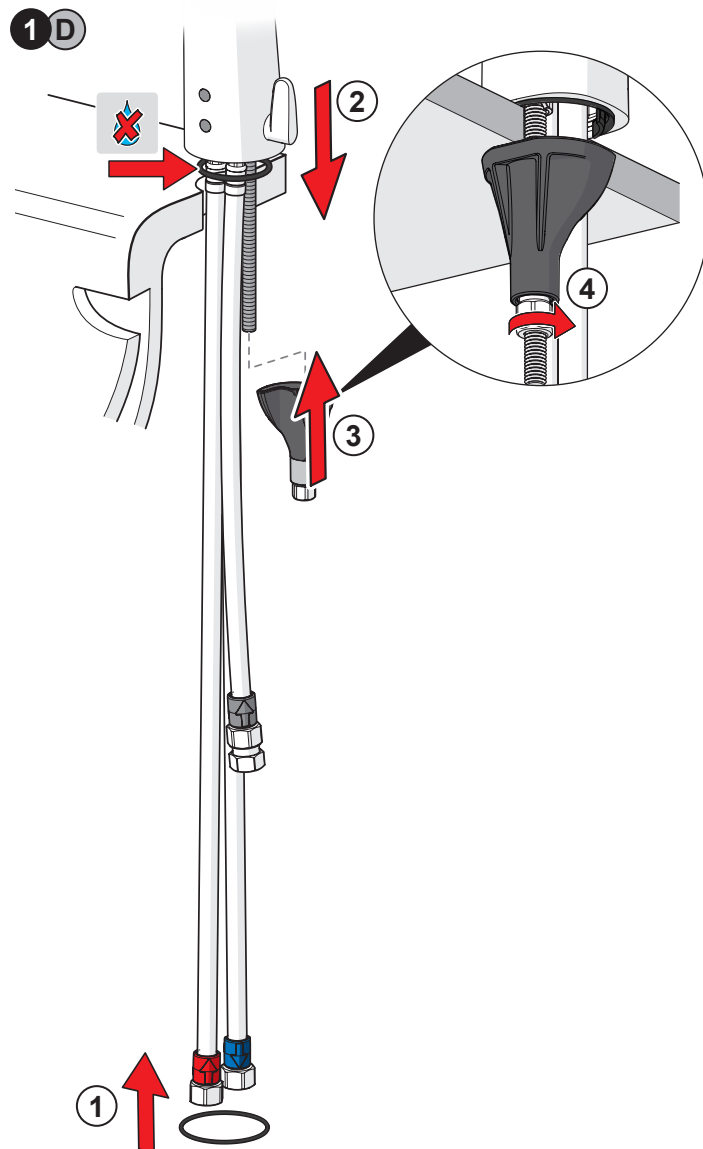







1 2

max.
1600 kPa

2 A

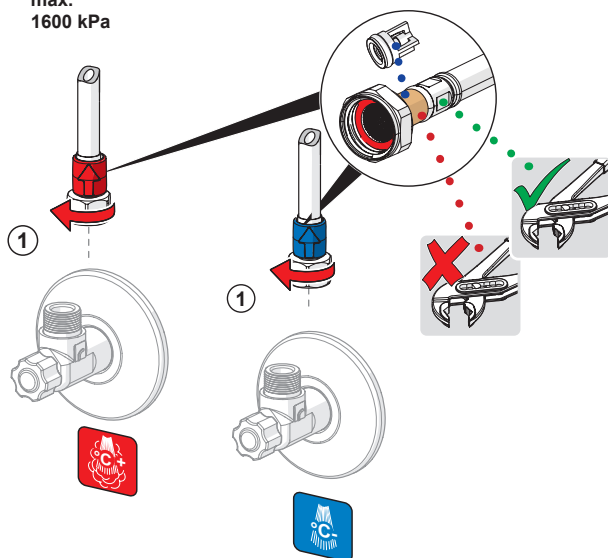

2 B

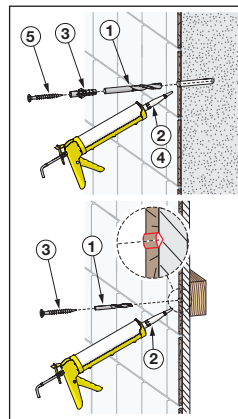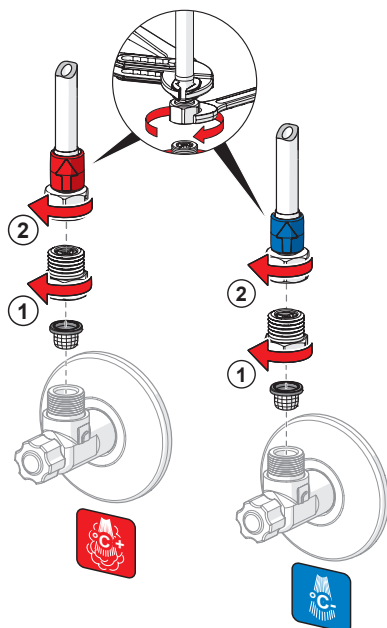






19
①②③④



max.
1600 kPa





2C

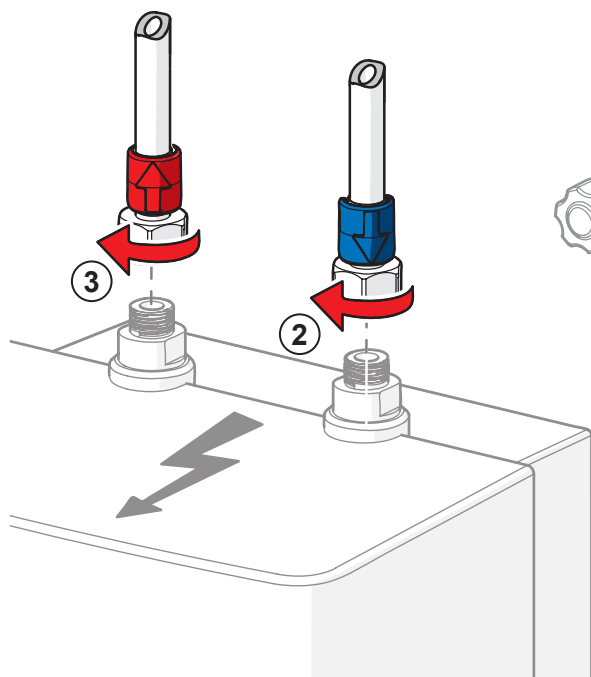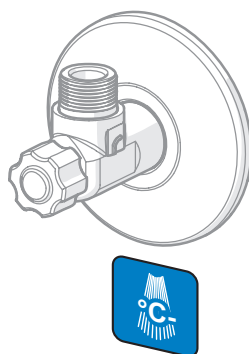
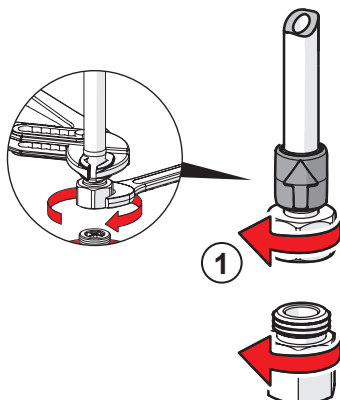




3 A

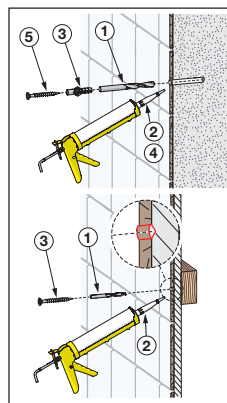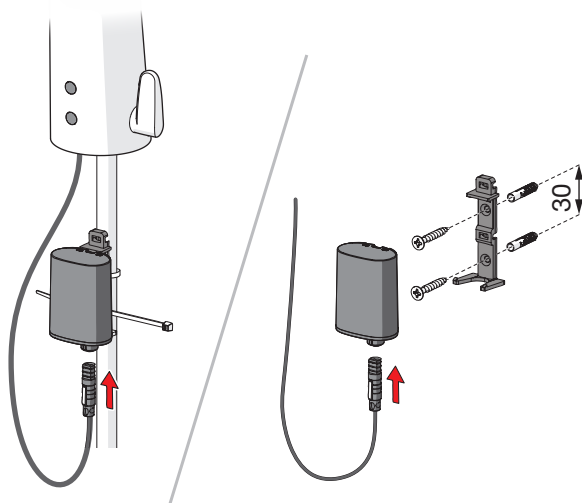


3 B

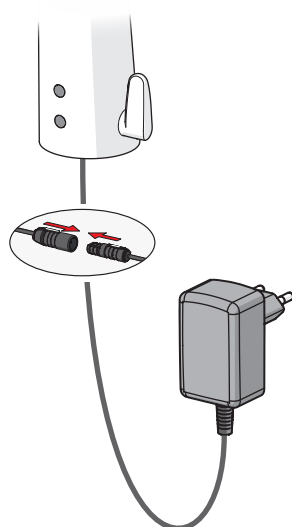





199550

3 C



199275

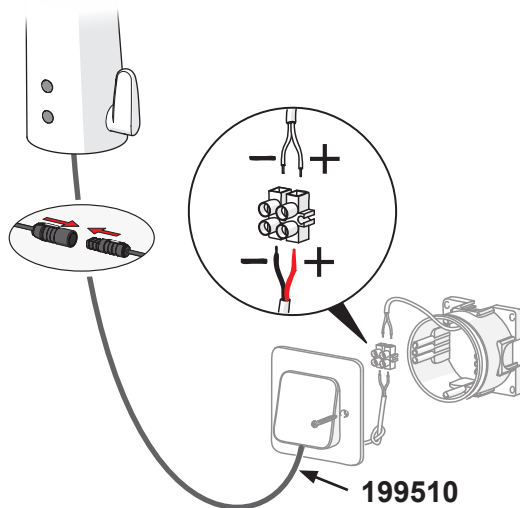

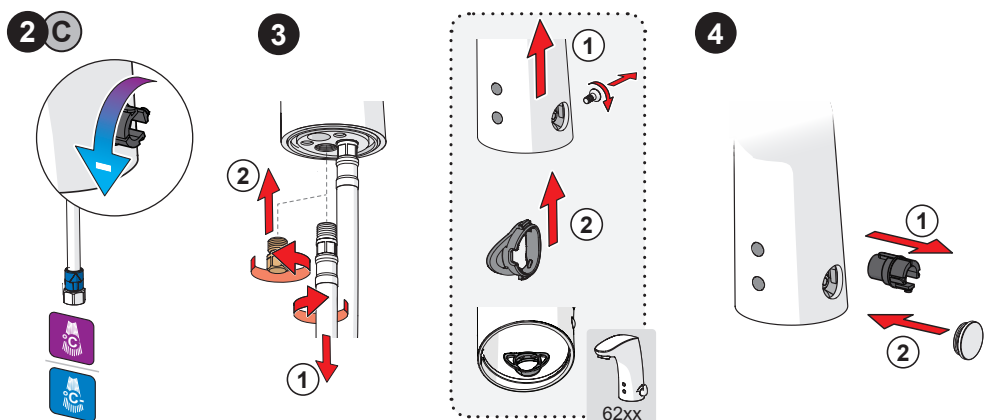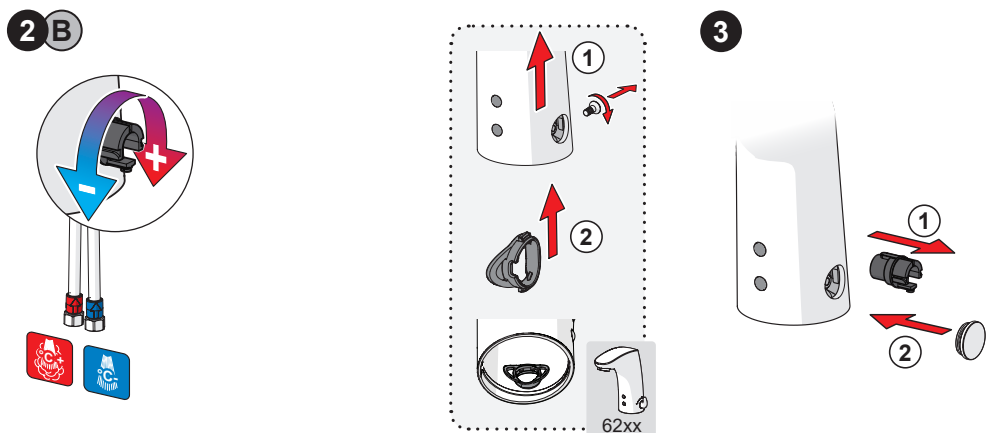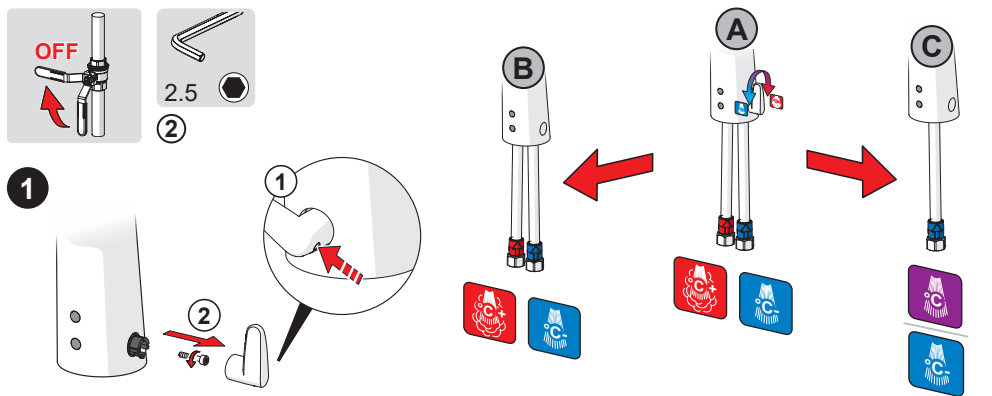




AUTOMATIC


2 s ± 1 s

max. 2 min

Bluetooth®







1 ON



2



3 OFF

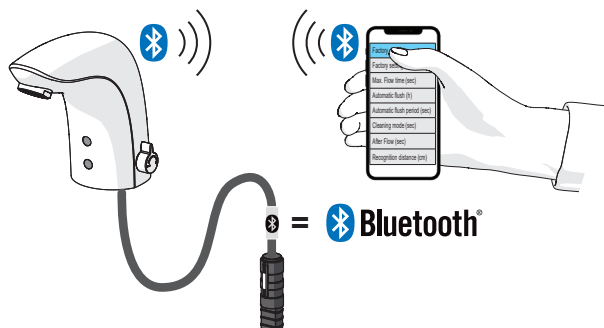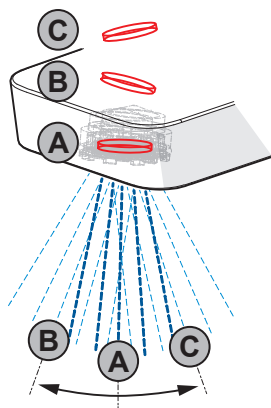






Oras App


Download on the
App Store

GET IT ON
Google Play




apps.oras.com




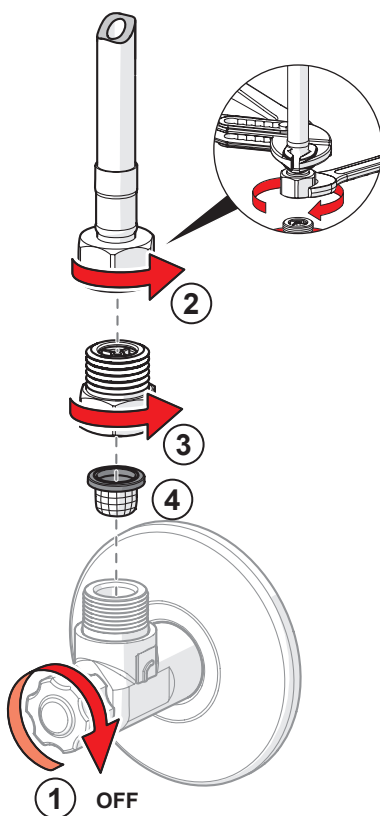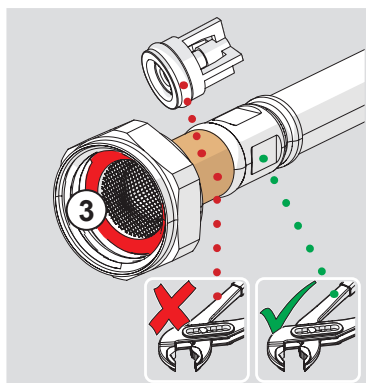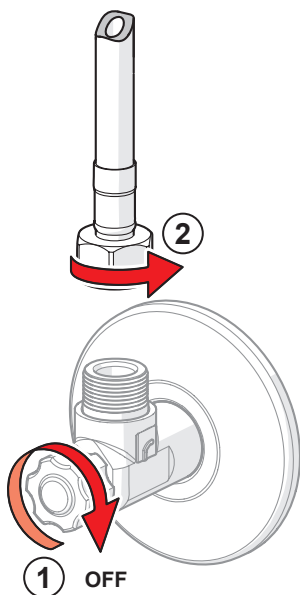







Lithium 2CR5 6V





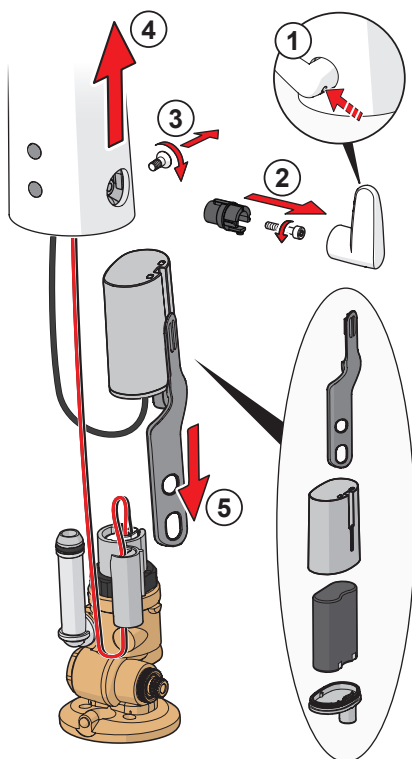
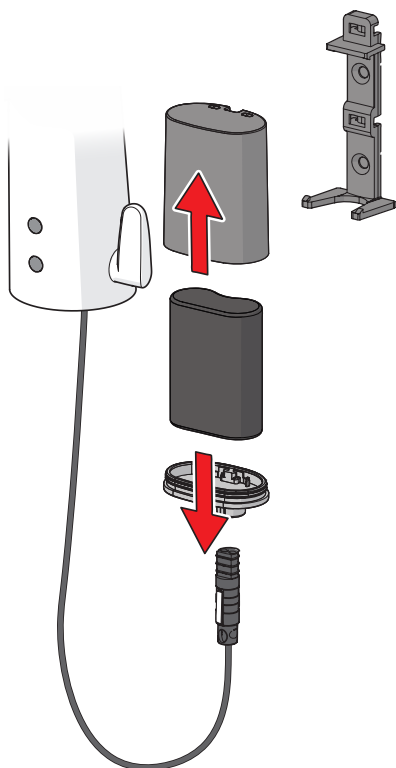










① ②


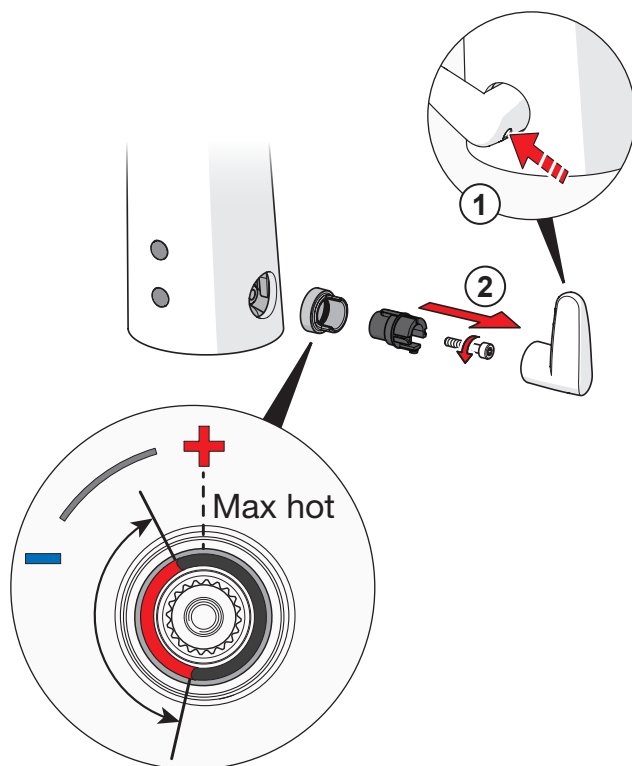


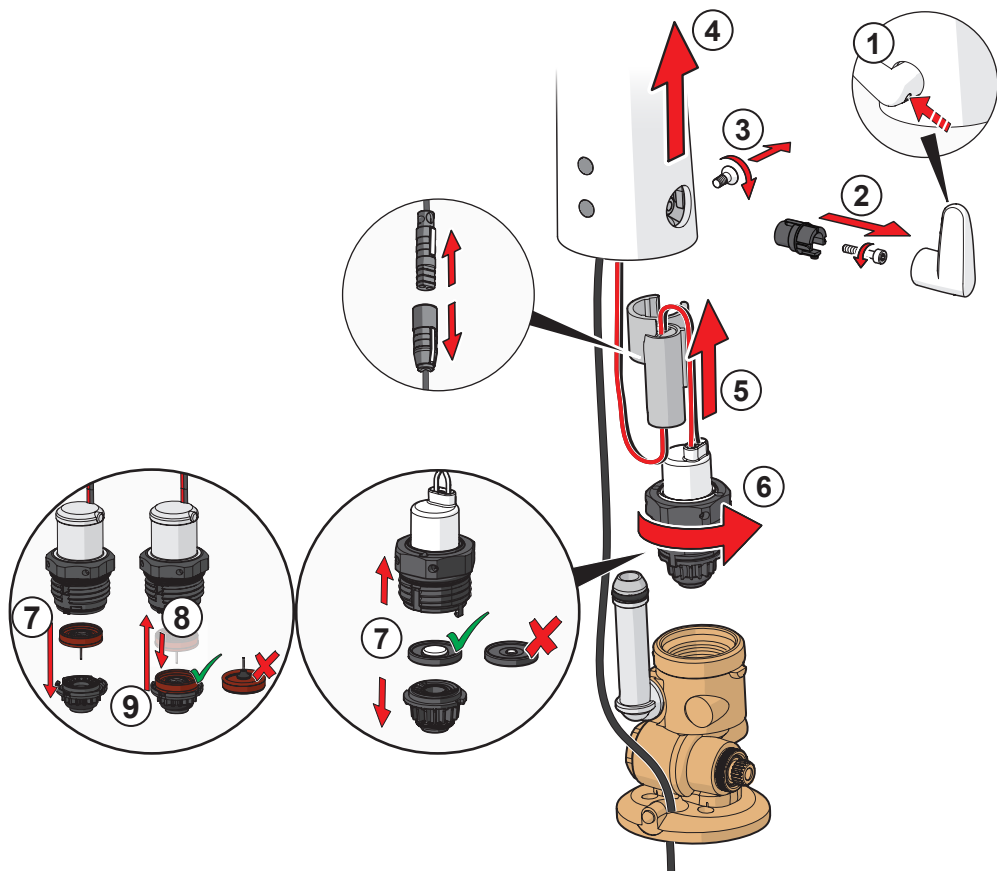

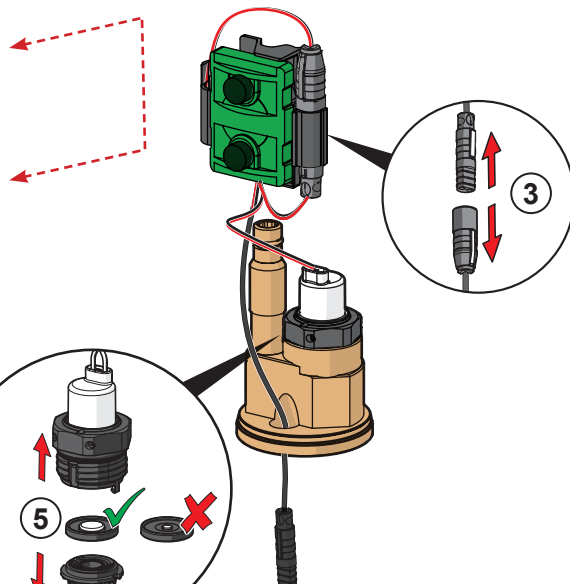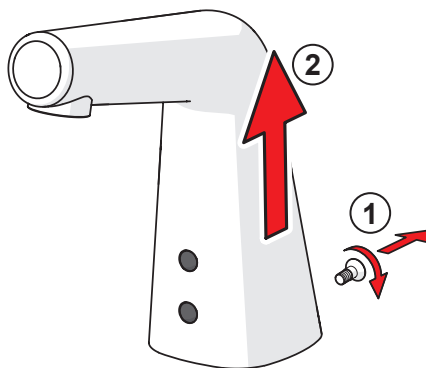



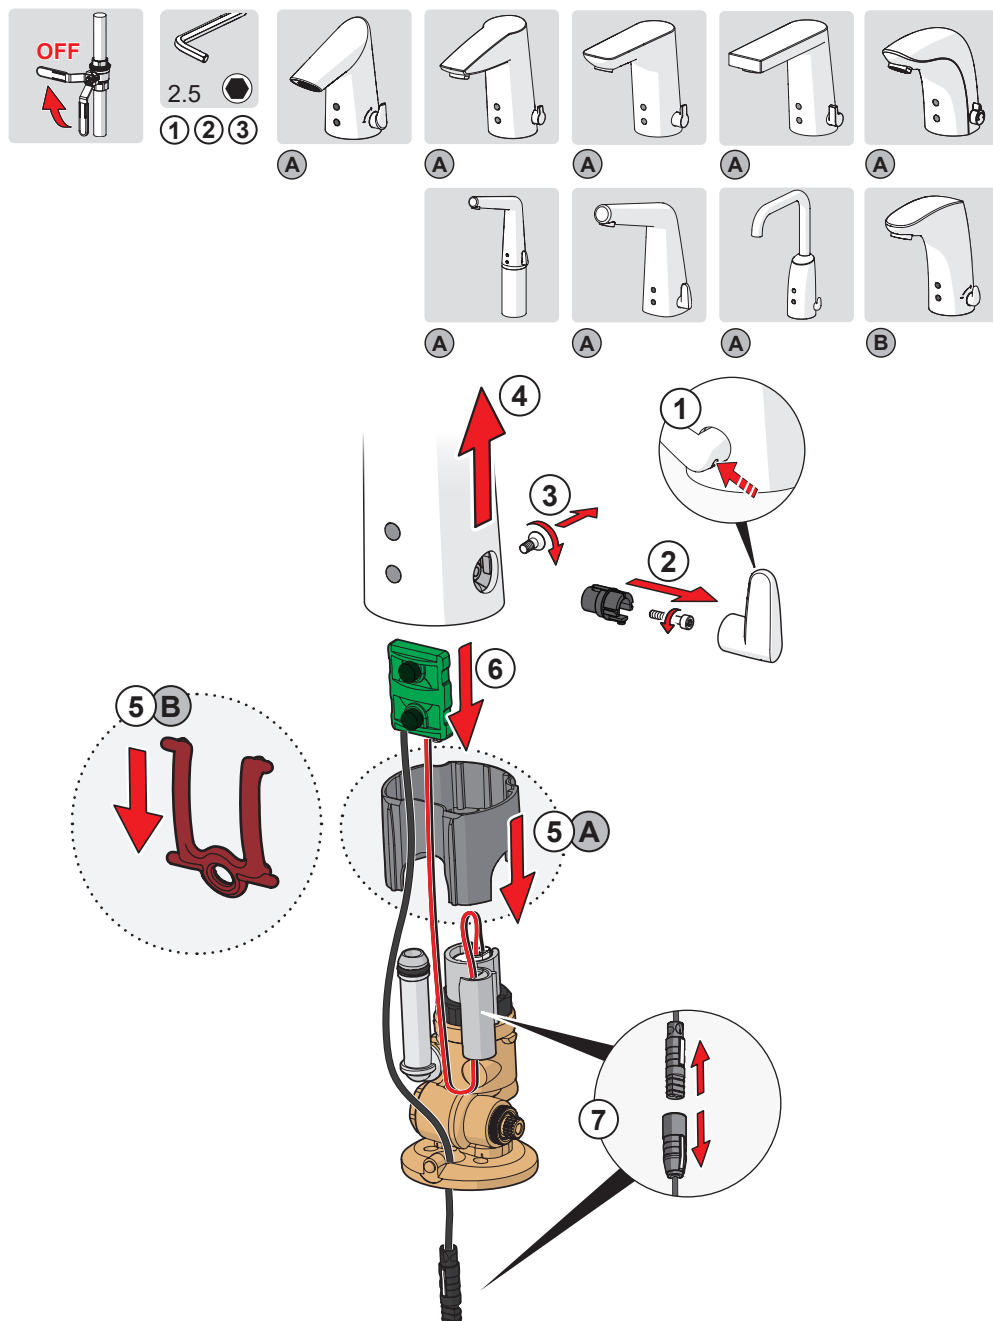

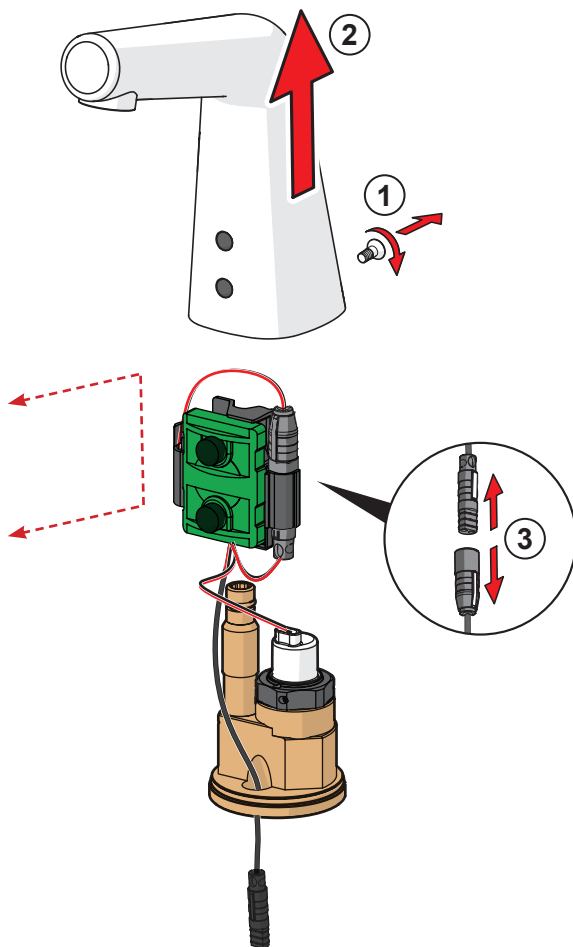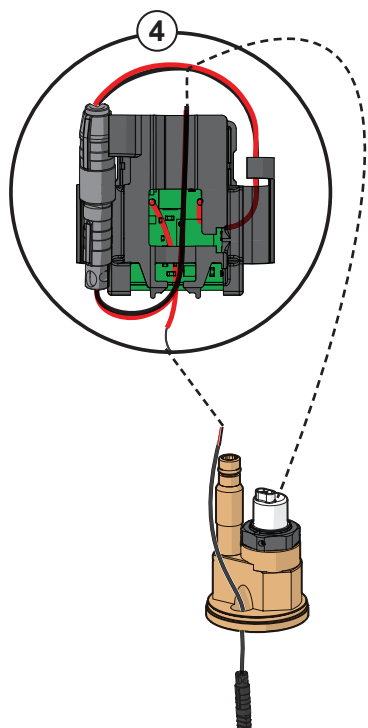











① ② ③ ⑤

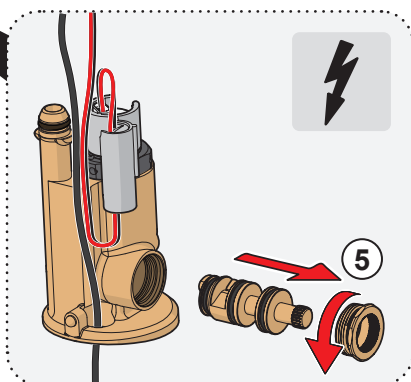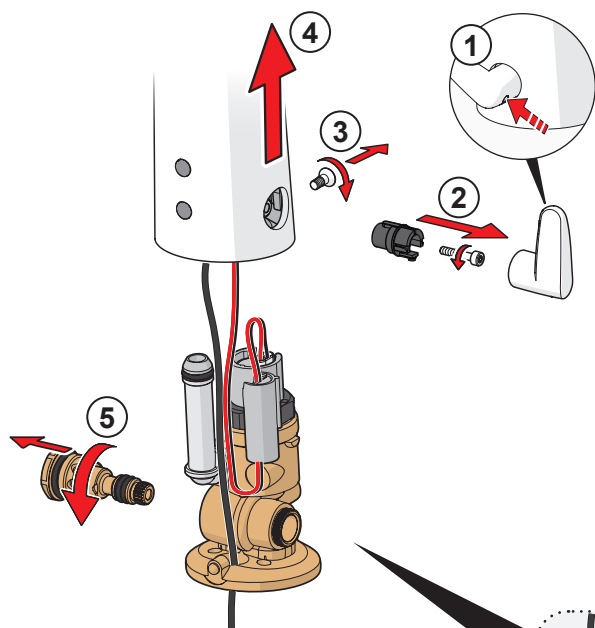



 **Bluetooth®**

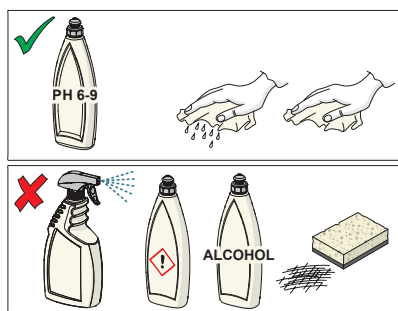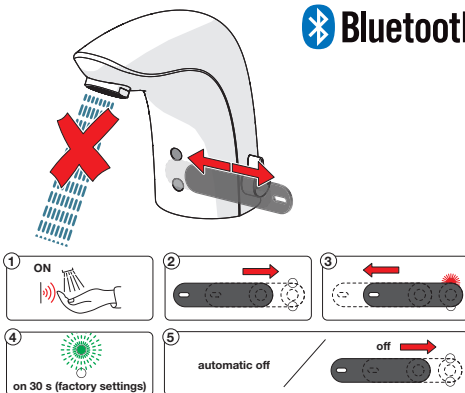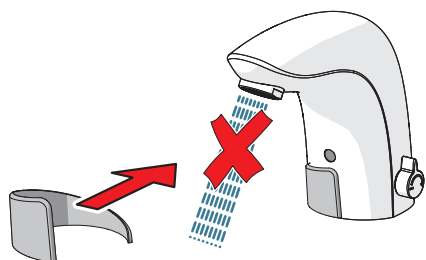

cleaning.oras.com

Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands: Oras and Hansa.

The Group's head office is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1,200 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

ORAS Ltd
Isometsäntie 2, P.O. Box 40
FI-26101 Rauma
Tel. +358 2 83 161
Fax +358 2 831 6300
info.finland@oras.com
www.oras.com



943421-12-22